

PRODUCT SPECIFICATION

X253T-IH

Wi-Fi Single-band 1x1 802.11b/g/n/ax + BLE5.2

IoT Combo Module

Version:V1.3

Customer: _____

Customer P/N: _____

Signature: _____

Date: _____

Office: 14th floor, Block B, phoenix zhigu, Xixiang Street, Baoan District, Shenzhen

Factory: NO.8, Litong RD., Liuyang Economic & Technical Development Zone, Changsha, CHINA

TEL: +86-755-2955-8186

Website: www.fn-link.com

X253T-IH Module Datasheet

Ordering Information	Part NO.	Description
	FGX253TIHX-00	GD32VW553HMQ6,802.11 AX/B/G/N,BLE5.2,24*16mm,A DC/GPIO/UART/SPI/IR 芯片内置 4MBflash



CONTENTS

1. General Description	5
1.1 Introduction	5
1.2 Description	5
2. Features	6
3. Block Diagram	6
4. General Specification	7
4.1 2.4G RF Specification	7
4.2 Bluetooth Specifications	7
5. Pin Definition	8
5.1 Pin Outline	8
5.2 Pin Definition details	8
6. Electrical Specifications	11
6.1 Power Supply DC Characteristics	11
7. Size reference	11
7.1 Module Picture	11
7.2 Marking Description	12
7.3 List of certified information	12
7.4 Physical Dimensions	13
7.5 Layout Recommendation	14
8. The Key Material List	14
9. Reference Design	15
10. Requirements for antenna placement	16
11. Recommended Reflow Profile	17
12. Package	18
12.1 Reel	18
12.2 Carrier Tape Detail	18
12.3 Packaging Detail	19
12.4 Tray	20
13. Moisture sensitivity	20

[illegible]

1. General Description

1.1 Introduction

The X253T-IH is a highly integrated 2.4GHz Wi-Fi and BLE module. It is an optimized module designed for a broad array of smart devices for Internet of Things (IoT) applications especially in areas such as industrial control, motor drives, user interface, power monitor and alarm systems, consumer and handheld equipment, gaming and GPS, E-bike, optical module and so on.

1.2 Description


Model Name	X253T-IH
Product Description	Support Wi-Fi/BLE functionalities
Dimension	L x W x H: 24 x 16 x 2.2 mm
Wi-Fi Interface	Support UART
BT Interface	UART
Operating temperature	-40°C to 85°C
Storage temperature	-40°C to 125°C

2. Features

General Features

- 802.11b/g/n/ax compatible
- 802.11i (WPA, WPA2, WPA3). Open, shared key, and pair-wise key authentication services
- Single antenna 1x1 stream in 20MHz channels
- Support of 802.11ax MCS up to MCS9 with Max phy rate as 114.7Mbps
- BLE5.2
- BLE Support High speed 2M PHY
- Built-in 2MB/4MB FLASH
- Onboard antenna

3. Block Diagram

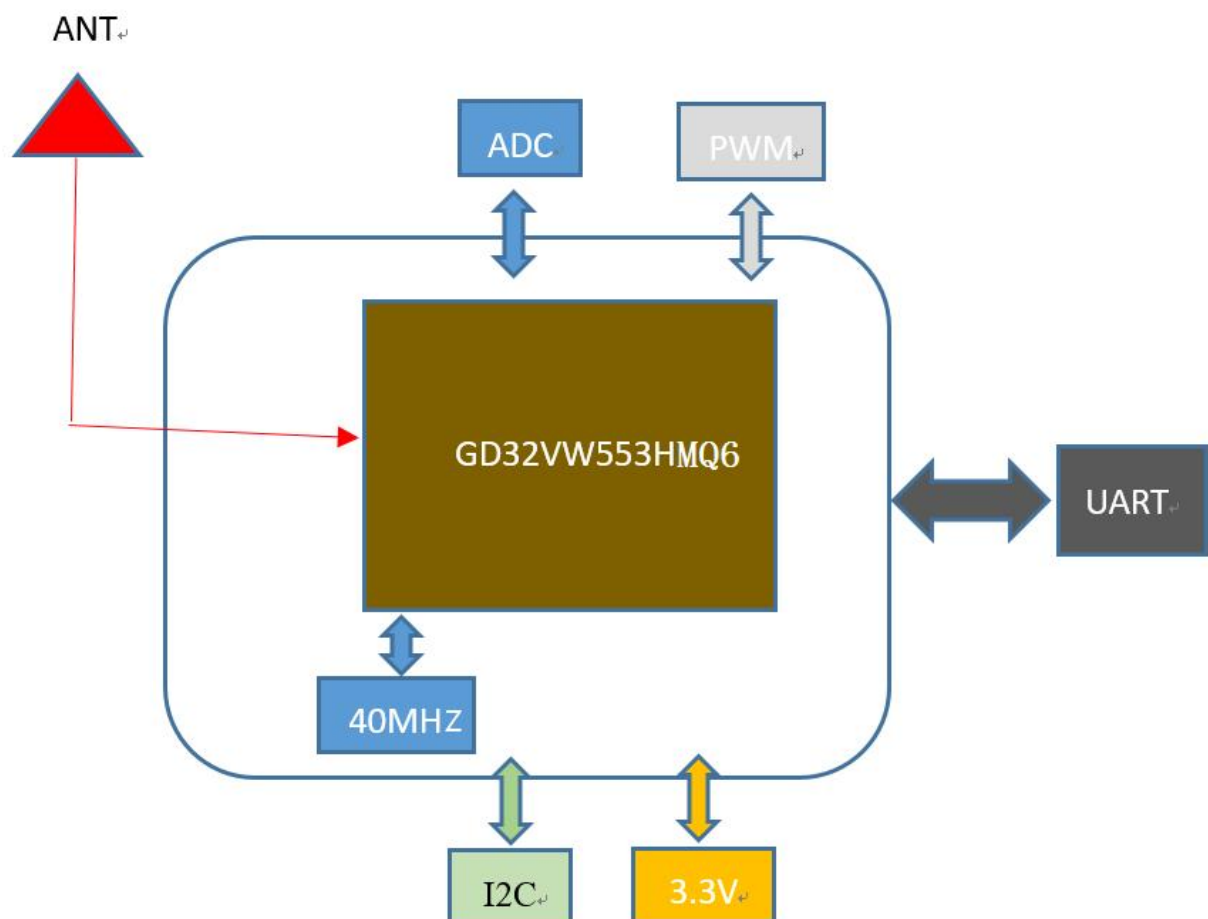

4. General Specification

4.1 2.4G RF Specification

features	describe	
WLAN 标准	IEEE 802.11 ax/b/g/n/ Wi-Fi compliant	
Range of frequency	2.400 GHz ~ 2.4835 GHz (2.4 GHz ISM Band)	
channels	2.4GHz: Ch1 ~ Ch14	
Test Items	Typical Value	EVM
Power output	802.11b /11Mbps : 17dBm $\pm$ 2 dB	EVM $\leq$ -9dB
	802.11g /54Mbps : 15dBm $\pm$ 2 dB	EVM $\leq$ -25dB
	802.11n20 /MCS7 : 14dBm $\pm$ 2 dB	EVM $\leq$ -28dB
	802.11ax /MCS7 : 14dBm $\pm$ 2 dB	EVM $\leq$ -32dB
	802.11ax /MCS9 : 12dBm $\pm$ 2 dB	EVM $\leq$ -32dB
Frequency spectrum template	Meet with IEEE standard	
Standard frequency	$\pm$ 20ppm	
Test Items	TYP Test Value	Standard Value
Receive Sensitivity (11b,20MHz) @8% PER	- 1Mbps @ -92 dBm	$\leq$ -83 dBm
	- 11Mbps @ -87 dBm	$\leq$ -76 dBm
Receive Sensitivity (11g,20MHz) @10% PER	- 6Mbps @ -89 dBm	$\leq$ -85 dBm
	- 54Mbps @ -74 dBm	$\leq$ -68 dBm
Receive Sensitivity (11n,20MHz) @10% PER	- MCS=0 @ -89 dBm	$\leq$ -85 dBm
	- MCS=7 @ -71 dBm	$\leq$ -67 dBm
Receive Sensitivity (11ax,20MHz) @10% PER	- MCS=0 @ -83 dBm	$\leq$ -82 dBm
	- MCS=9 @ -66 dBm	$\leq$ -62dBm
Maximum receiving level	802.11b : -10 dBm	
	802.11ax/g/n : -20 dBm	

4.2 Bluetooth Specifications

Feature	Description
General Specification	
Bluetooth Specification	Bluetooth V5.2
Host interface	UART
Range of frequency	2400 MHz ~ 2483.5 MHz
channels	40 channels


Radio frequency Specifications

	Min(dBm)	Typical(dBm)	Max(dBm)
Power output	4	6	8
sensitivity @ BLE=30.8%			-93
Maximum input level	GFSK (1Mbps):-20dBm		

5. Pin Definition

5.1 Pin Outline

< TOP VIEW >

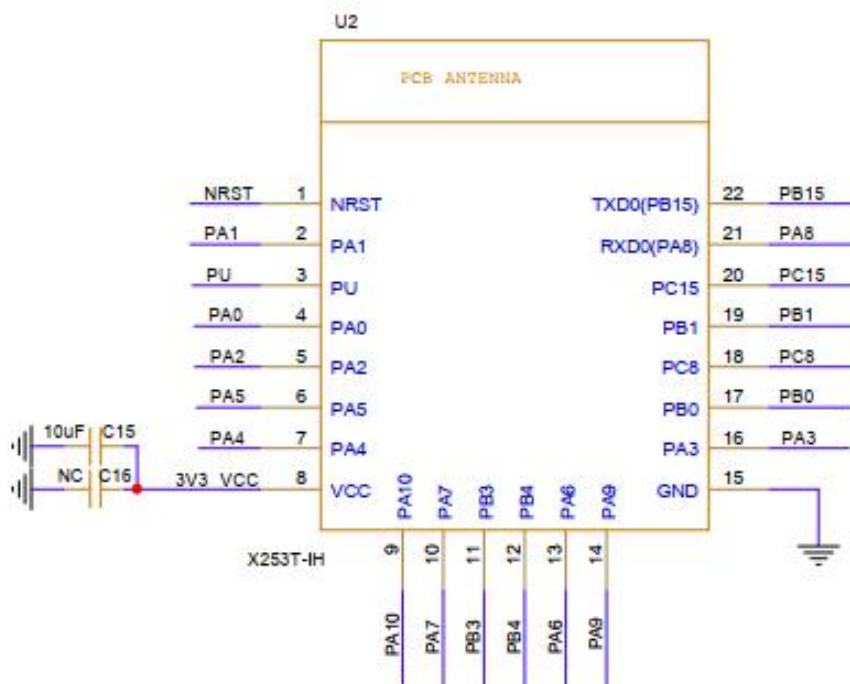

5.2 Pin Definition details

NO.	Name	Type	Description	Voltage
1	NRST	-	Default: NRST	
2	PA1	I/O	Default: PA1 Alternate: USART0_RX, TIMER1_CH1, SPI_MISO, UART1_RTS, EVENTOUT Additional: ADC_IN1	
3	PU	-	Default: PU	

4	PA0	I/O	Default: PA0 Alternate: USART0_TX, TIMER1_CH0, TIMER1_ETI, SPI_MOSI, UART1_CTS, TIMER0_ETI, EVENTOUT	
5	PA2	I/O	Default: PA2 Alternate: USART0_CTS, TIMER1_CH2, I2C0_SCL, SPI_SCK, TIMER0_CH0, UART1_TX, EVENTOUT Additional: ADC_IN2	
6	PA5	I/O	Default: PA5 Alternate: UART1_RX, TIMER2_ETI, QSPI_CSN, SPI_MISO, SPI_SCK, TIMER0_CH1_ON, EVENTOUT Additional: ADC_IN5	
7	PA4	I/O	Default: PA4 Alternate: UART1_TX, SPI_MOSI, QSPI_SCK, SPI_NSS, TIMER0_CH1, EVENTOUT Additional: ADC_IN4	
8	VCC	P	3.3V(+/-0.3)	
9	PA10	I/O	Default: PA10 Alternate: SPI_MISO, TIMER0_CH2, QSPI_CSN, TIMER16_CH0, USART0_RX, EVENTOUT	
10	PA7	I/O	Default: PA7 Alternate: I2C1_SDA, TIMER0_CH0_ON, TIMER2_CH1, QSPI_IO1, SPI_NSS, SPI_MOSI, TIMER0_CH1_ON, UART2_RX, TIMER1_CH2, EVENTOUT Additional: ADC_IN7, WAKUP2	
11	PB3	I/O	Default: JTDO, PB3 Alternate: TIMER1_CH1, QSPI_IO2, USART0_RX, UART1_RX, TIMER15_BRKIN, EVENTOUT	
12	PB4	I/O	Default: NJTRST, PB4 Alternate: TIMER1_CH0, TIMER1_ETI, QSPI_IO3, USART0_TX, UART1_TX, EVENTOUT	
13	PA6	I/O	Default: PA6 Alternate: TIMER2_CH0, QSPI_IO0, I2C1_SCL, SPI_MISO, SPI_SCK, TIMER0_CH1, TIMER1_CH1, UART2_TX, EVENTOUT Additional: ADC_IN6	
14	PA9	I/O	Default: PA9 Alternate: SPI_MOSI, TIMER0_CH1, QSPI_SCK, USART0_TX, TIMER15_CH0_ON, EVENTOUT	

15	GND	P	GND	
16	PA3	I/O	Default: PA3 Alternate: USART0_RTS, TIMER1_CH3, I2C0_SDA, SPI_NSS, TIMER0_CH0_ON, UART1_RX, RTC_OUT, EVENTOUT Additional: ADC_IN3	
17	PB0	I/O	Default: PB0 Alternate: TIMER0_CH1_ON, TIMER0_CH0, TIMER0_CH2, UART1_TX, I2C0_SCL, TIMER2_ETI, TIMER16_CH0, UART2_CTS, TIMER0_BRKIN, EVENTOUT Additional: ADC_IN8	
18	PC8	I/O	Default: PC8 Alternate: TIMER2_CH2, I2C0_SDA, I2C1_SDA, USART0_TX, UART1_TX, EVENTOUT Additional: BOOT0	
19	PB1	I/O	Default: PB1 Alternate: TIMER0_CH2_ON, TIMER0_CH0_ON, TIMER2_CH2, UART1_RX, I2C0_SDA, TIMER16_CH0_ON, UART2_RTS, EVENTOUT Additional: BOOT1	
20	PC15	I/O	Default: PC15 Alternate: IFRP_OUT, EVENTOUT Additional: OSC32OUT	
21	PA8	I/O	Default: PA8 Alternate: CK_OUT0, TIMER0_CH0, USART0_RX, UART1_RX, I2C0_SDA, I2C1_SDA, USART0_CK, TIMER15_CH0, RTC_OUT, TIMER0_CH2_ON, EVENTOUT	
22	PB15	I/O	Default: PB15 Alternate: RTC_REFIN, TIMER0_CH2_ON, TIMER2_CH0, I2C0_SCL, I2C1_SCL, UART1_TX, USART0_TX, IFRP_OUT, EVENTOUT	

I = Input, O = Output, P = power.




6. Electrical Specifications

6.1 Power Supply DC Characteristics


	MIN	TYP	MAX	Unit
Operating Temperature	-40	25	85	deg.C
VCC33	3.0	3.3	3.6	V

7. Size reference

7.1 Module Picture

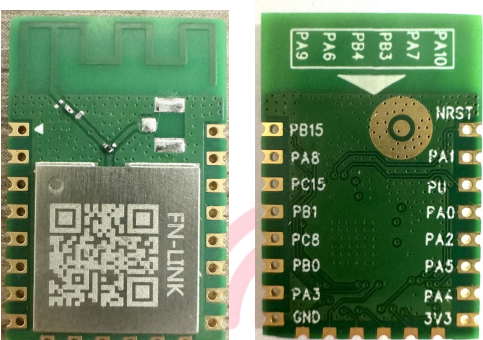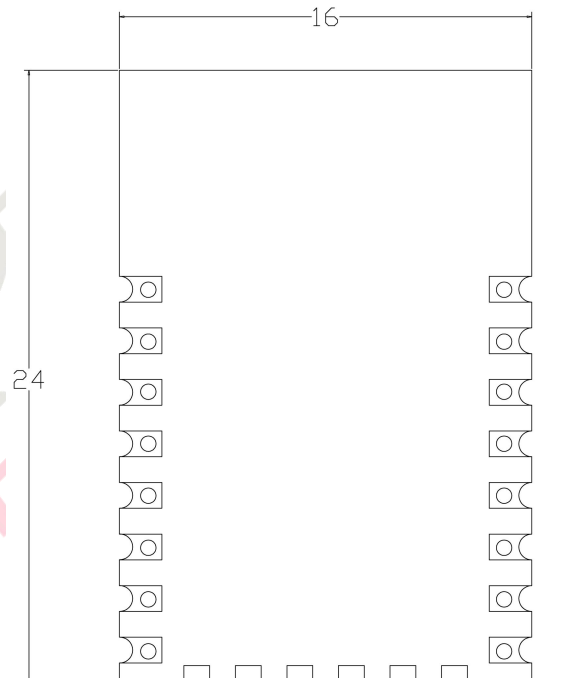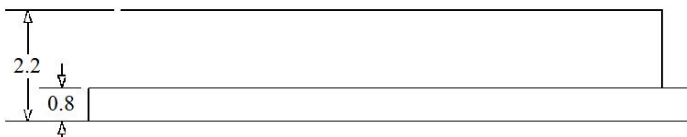L x W : 24 x16 (±0.2 mm) 	
H: 2.2(±0.2) mm	
重量	1.06±0.01g


7.2 Marking Description

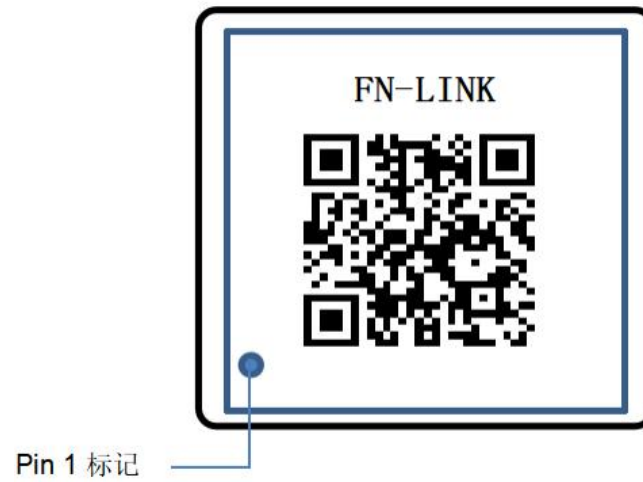

7.3 List of certified information


Certification project	Certificate number
SRRC	TBD
FCC	TBD
CE	0370-RED-7287
IC	TBD
NCC	TBD
KCC	TBD
TELEC	TBD
Brazil	TBD
Argentina	TBD
Japan	TBD

7.4 Physical Dimensions

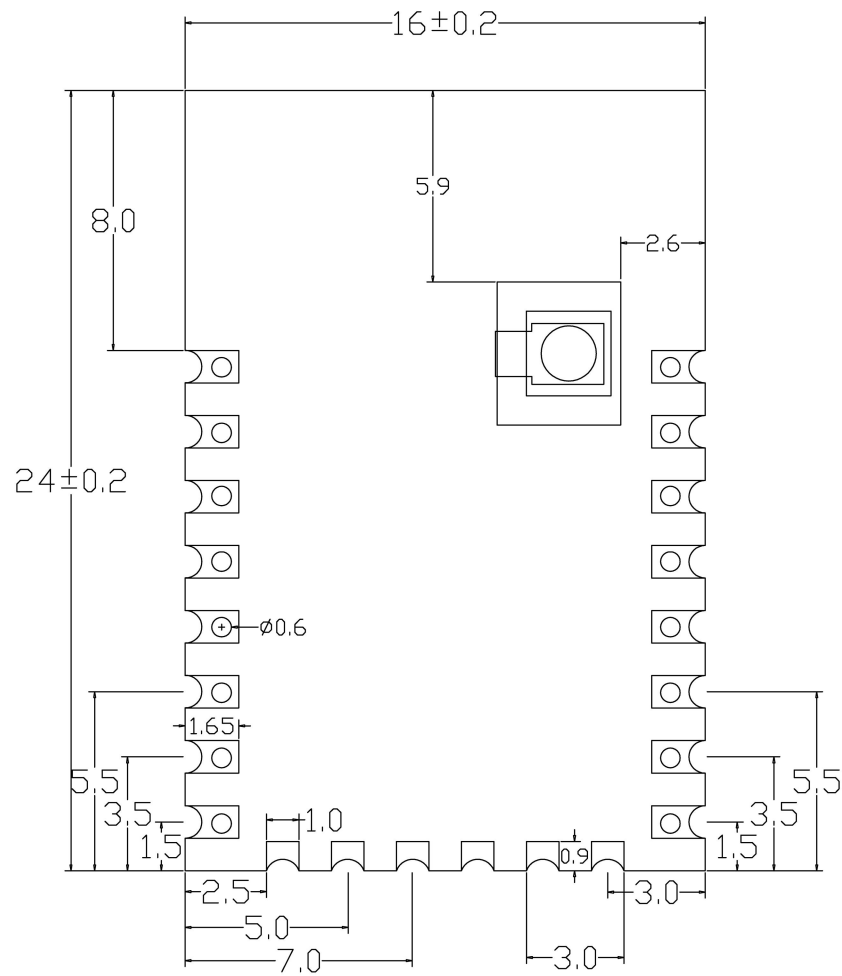

注:未标注焊盘公差值皆为 $\pm 0.1\text{mm}$

7.5 Layout Recommendation

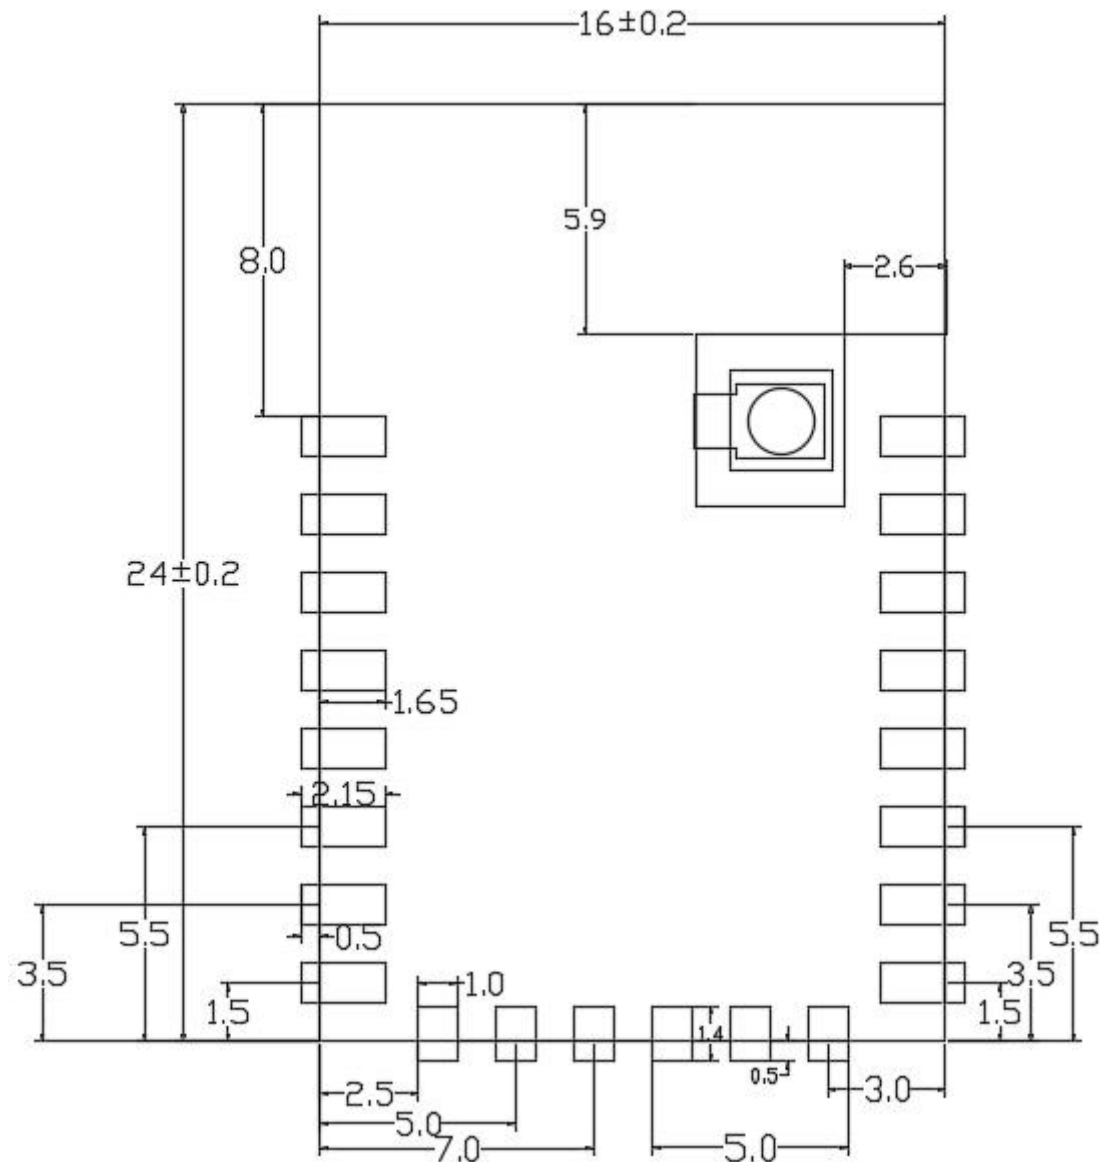


注:未标注焊盘公差值皆为 ± 0.1 mm

8. The Key Material List

Item	Part Name	Description	Manufacturer
1	Crystal	2016 40MHz 9pf ± 10 ppm	ECEC, TKD, Hosonic, JWT, TXC
2	Chipset	GD32VW553HMQ6 QFN40	GigaDevic
3	PCB	X253T-IH-V1.0, 深绿色, FR4, 4层有卤 TG150, 16*24*0.8mm	XY-PCB, Sunlord-PCB
4	Shielding	X253T-IH Shielding	信太, 卓益, 精力通

9. Reference Design

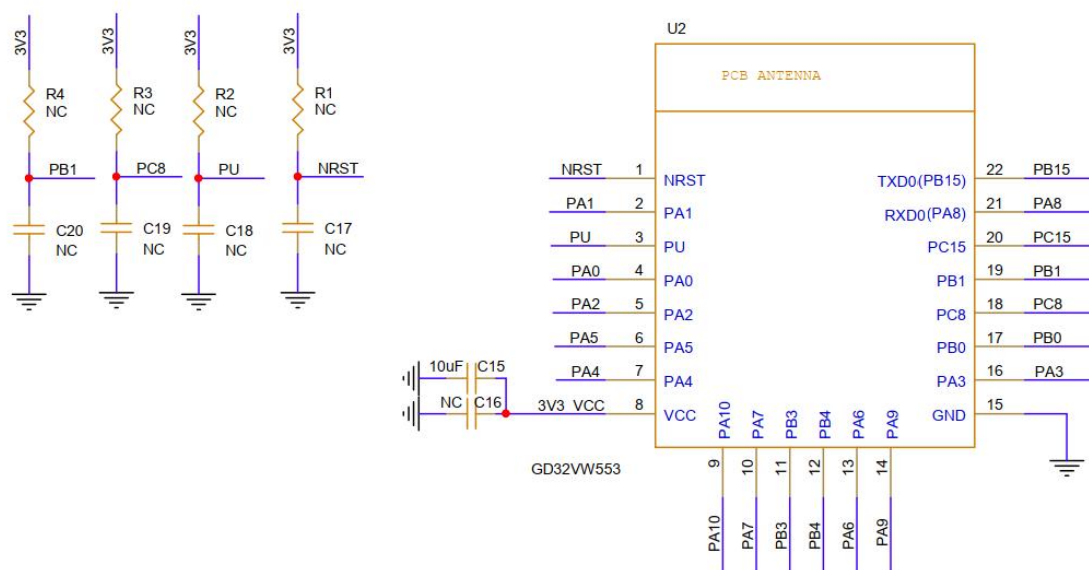

管脚 **PU** 和 **NRST** 分别为芯片电源使能与复位管脚，两者都拉高时，芯片才能工作。设计时可在靠近管脚的位置摆放滤波电容与上拉电阻，若 X253T-IH 作为主控 MCU，推荐使用 **NRST** 作为使能管脚，同时 **PU** 常拉高；若 X253T-IH 作为从属设备，则推荐使用 **PU** 作为使能管脚，同时 **NRST** 常拉高。3.3V 电源建议预留电大于 600mA。


boot 模式选择管脚为 BOOT0(PC8)和 BOOT1(PB1)

PB15 与 PA8 为默认烧录口。log 打印口。烧录是 PC8 接 3,3V, PB1 接 GND, 烧录完屏蔽悬空, PC8 接 GND

BOOT1	BOOT0	启动模式
X	0	Flash
0	1	Legacy Bootloader
1	1	SRAM

10. Requirements for antenna placement

使用 Wi-Fi 模块上的 PCB 天线时，主板上的 PCB 与其他金属设备的距离至少为 16mm。下图阴影区域需要远离金属设备、传感器、干扰源和其他可能干扰信号的材料。

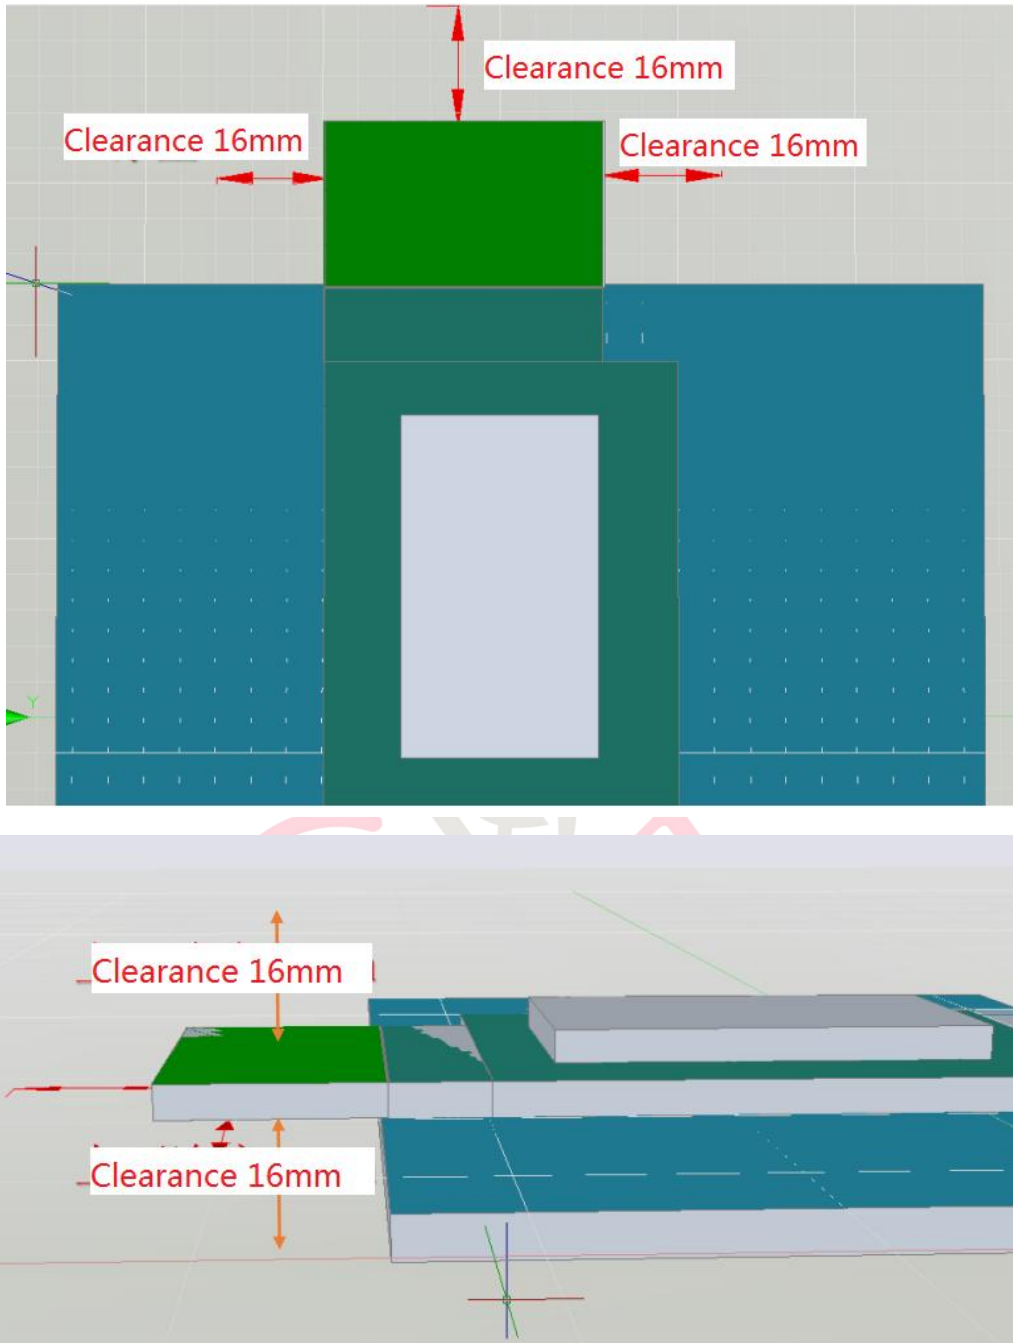


11. Recommended Reflow Profile

Referred to IPC/JEDEC standard.

Peak Temperature: $260 \pm 5^{\circ}\text{C}$

5Time within 5°C of peak temperature: $\geq 10\text{s}$


Number of Times: 2 times

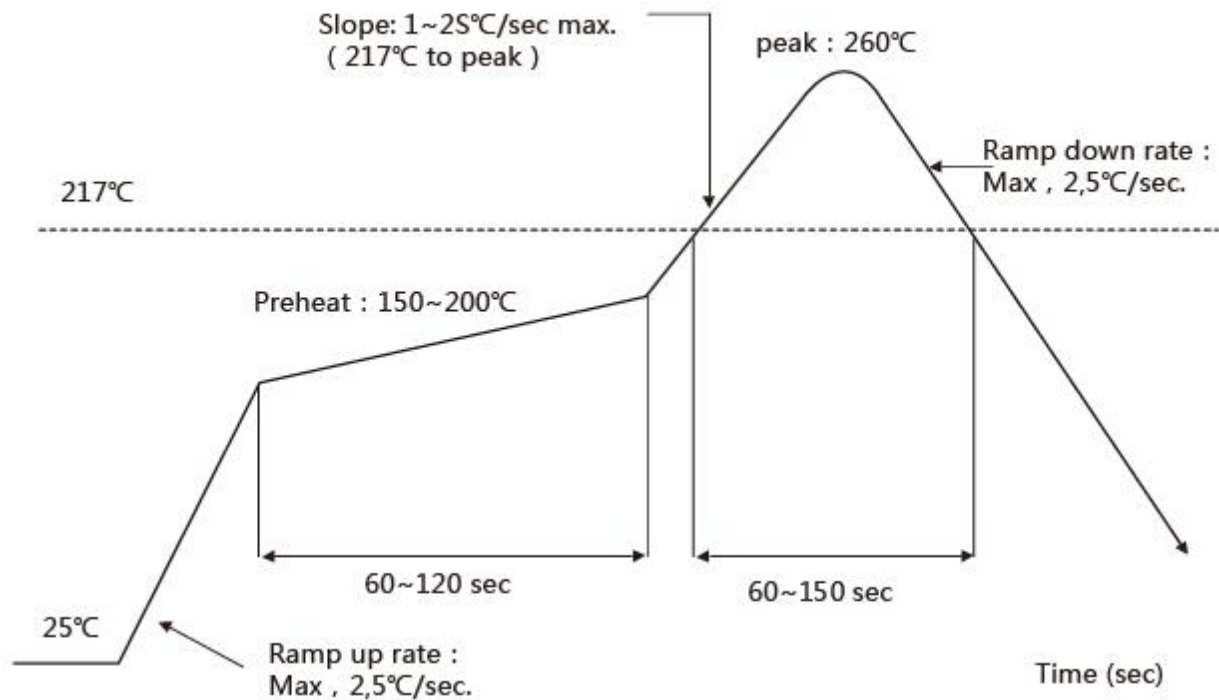

12. Package


12.1 Reel

A roll of 860pcs

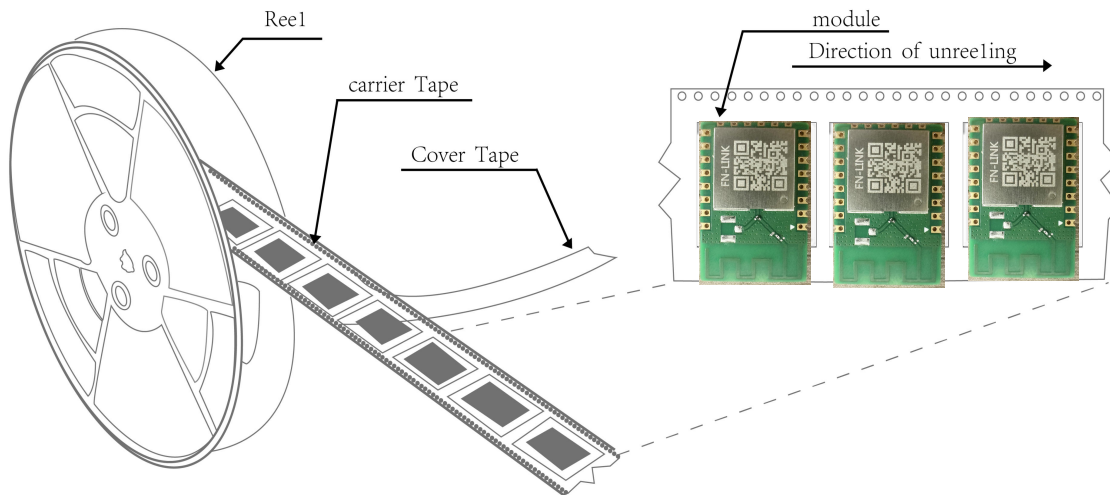

12.2 Carrier Tape Detail

ITEM	W	A0	B0	D	E	F	F1	K0	P0	P2	P	T
DIM	44	16.00	24.00	1.5	1.75	20.2	40.4	3.60	4.0	2.0	24.0	0.30
TOLE	$\begin{smallmatrix} +0.3 \\ -0.3 \end{smallmatrix}$	± 0.15	± 0.15	$\begin{smallmatrix} +0.1 \\ -0.0 \end{smallmatrix}$	± 0.1	± 0.15	± 0.10	± 0.10	± 0.1	± 0.15	± 0.1	± 0.05

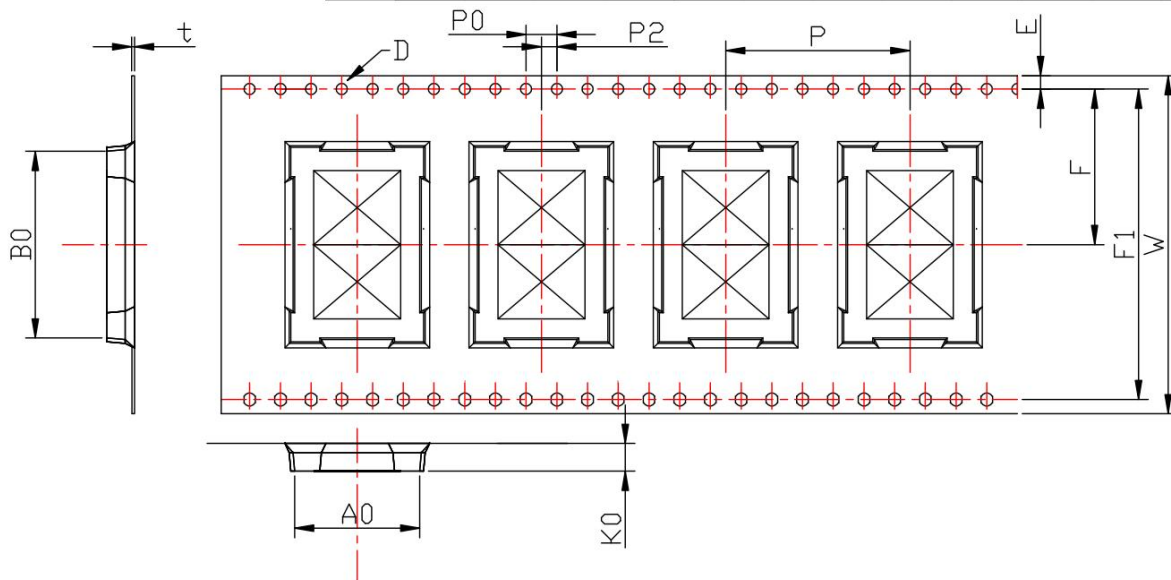

12.3 Packaging Detail

the take-up package



Using self-adhesive tape

Size of black tape: 24mm*24.4m the cover tape :21.3mm*32.6m

Color of plastic disc: blue



NY bag size:450mm*415mm




size : 350*350*35mm



The packing case size:360*210*370mm

12.4 Tray

Use pallet packaging for less than 300 pieces

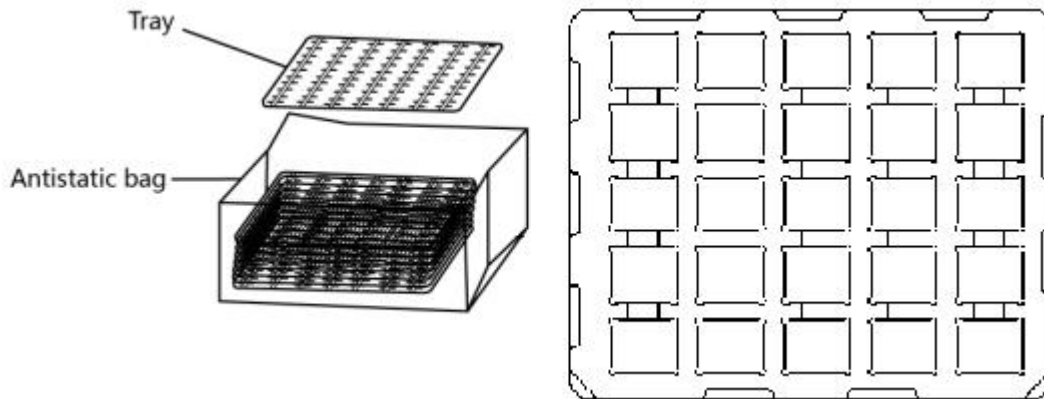

13. Moisture sensitivity

The Modules is a Moisture Sensitive Device level 3, in according with standard IPC/JEDEC J-STD-020, take care

all the relatives requirements for using this kind of components.

Moreover, the customer has to take care of the following conditions:

- Calculated shelf life in sealed bag: 12 months at <40°C and <90% relative humidity (RH)
- Environmental condition during the production: 30°C / 60% RH according to IPC/JEDEC J-STD-033A paragraph 5
- The maximum time between the opening of the sealed bag and the reflow process must be 168 hours if condition
- “IPC/JEDEC J-STD-033A paragraph 5.2” is respected
- Baking is required if conditions b) or c) are not respected

f) Baking is required if the humidity indicator inside the bag indicates 10% RH or more

